


LEGEND

- BARREL PYLON (TC-54)
- ▨ CONSTRUCTION AREA
- d SIGN AND TYPE SEE OTM BOOK 7 FIELD EDITION FOR SIGN TYPES

STAGE 1 TRAFFIC MANAGEMENT (1 DAY DURATION)

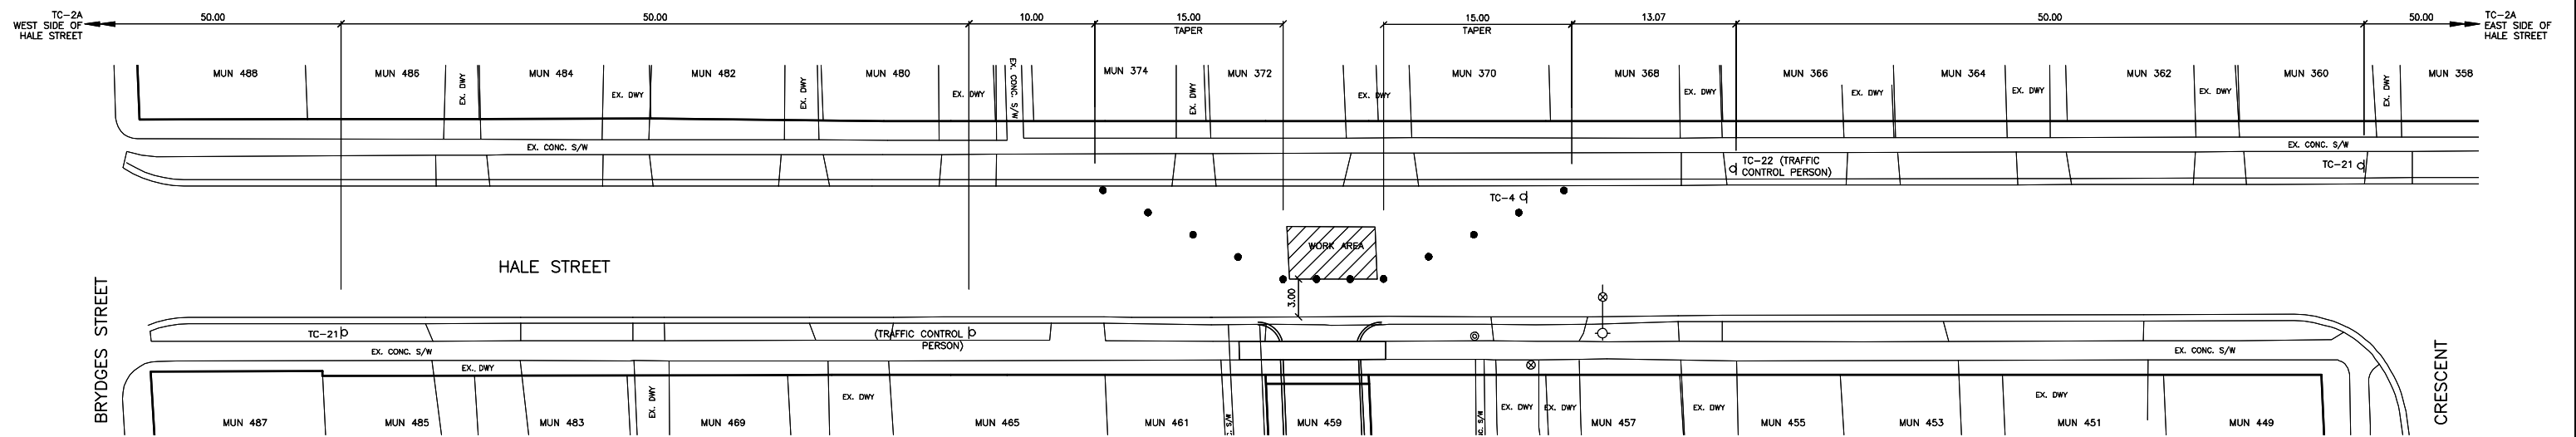


TRAFFIC MANAGEMENT NOTES:

1. ALL WORK SHALL BE COMPLETED IN ACCORDANCE WITH THE ONTARIO TRAFFIC MANUALS.
2. ANY MODIFICATIONS TO THIS PLAN SHALL RECEIVE PRIOR APPROVAL OF THE CONTRACT ADMINISTRATOR.
3. CONTRACTOR TO PROVIDE DETAILED PLAN TO THE CONTRACT ADMINISTRATOR SHOWING SIGNAGE, FLAGGING AND TRAFFIC BARRIER LAYOUT FOR APPROVAL PRIOR TO THE START OF CONSTRUCTION.
4. ADVANCED SIGNING SHALL BE POSTED 2 WEEKS PRIOR TO CONSTRUCTION.
5. ANY CHANGES TO THIS PLAN SHALL BE APPROVED BY THE CONTRACT ADMINISTRATOR.
6. THE WORK ON HALE STREET ROAD ALLOWANCE SHALL BE COMPLETED IN TWO CONSECUTIVE DAYS. ON THE FIRST DAY, THE WORK SHALL START AT 9AM AND THE ROADWAY SHALL BE BACKFILLED TO SURFACE WITH GRANULAR A BY 4PM THE SAME DAY. THE CONTRACTOR SHALL PLACE BUMP SIGNS ON THE ROADWAY FOR OVERNIGHT AND THE ASPHALT (BASE AND TOP COAT), CURB/GUTTER AND SIDEWALK SHALL BE FULLY COMPLETED ON THE SECOND DAY.
7. CONTRACTOR SHALL POST ADVANCE SIGNAGE "LANE REDUCTIONS DUE TO CONSTRUCTION ON HALE STREET" 2 WEEKS PRIOR TO CONSTRUCTION.

TRAFFIC MANAGEMENT PLAN AS PER FIGURE TS-15 IN THE ONTARIO TRAFFIC MANUAL BOOK 7

STAGE 2 TRAFFIC MANAGEMENT (1 DAY DURATION)

NOTE: TEMPORARY LANE WIDTHS TO BE A MINIMUM 3.0m WIDE

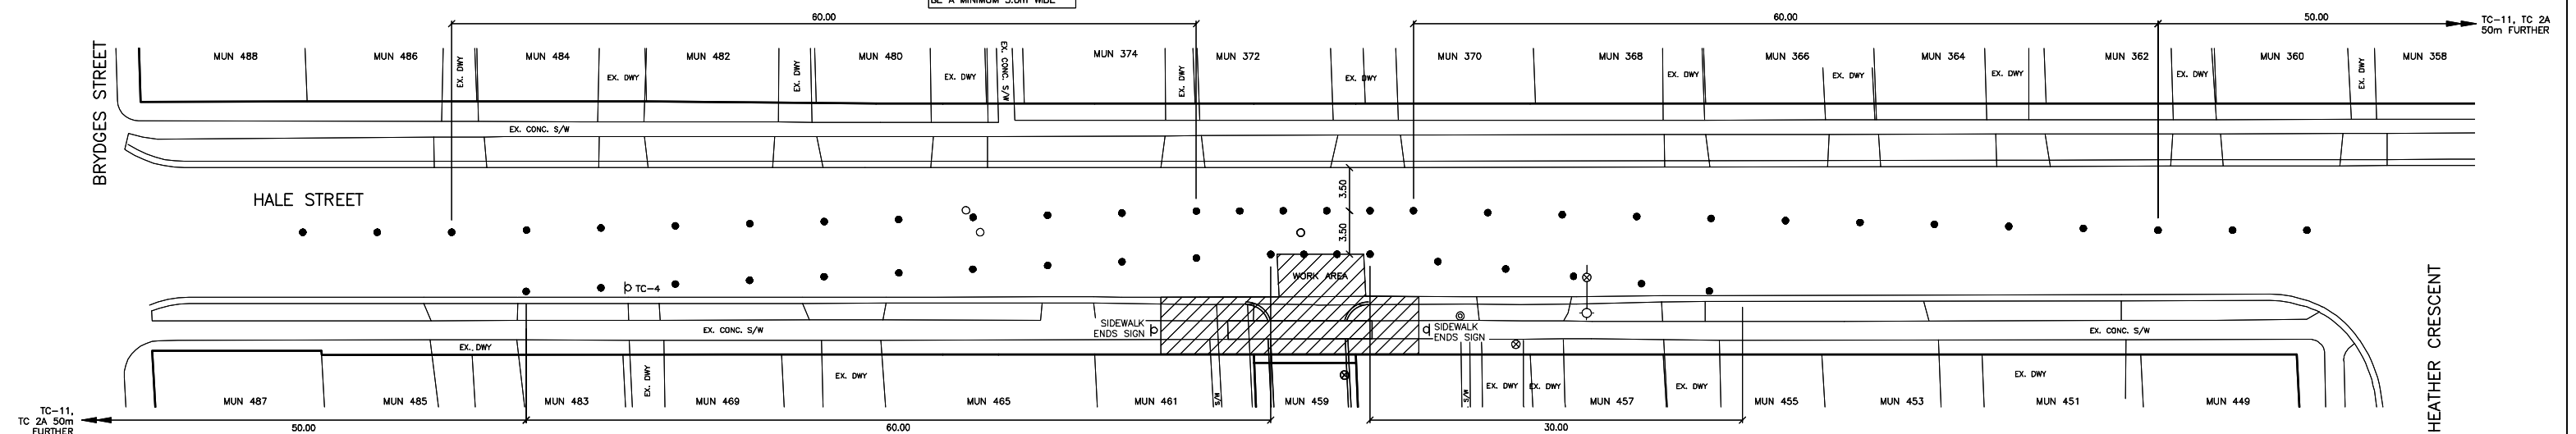

TRAFFIC MANAGEMENT PLAN AS PER FIGURE TS-8 IN THE ONTARIO TRAFFIC MANUAL BOOK 7

EXISTING SERVICES	DRAWING #, SOURCE	CONSTRUCTION DATE	CONSTRUCTED SERVICES	COMPLETION	DETAILS	No.	REVISIONS	DATE	CONSULTANT
					DESIGN KM		FOR 1ST SUBMISSION	OCT. 2024	AH
					DRAWN BY AH				
					CHECKED KM				
					APPROVED KM				
					DATE AUG. 2024				

CONSULTANT OR SERVICE AREA

ENGINEER'S STAMP

SCALE

HORIZONTAL SCALE - 1 : 200

TITLE

459 HALE STREET
 GRAND OAK HOMES

TRAFFIC MANAGEMENT PLAN

PROJECT No: **43353-100**

SHEET No: **3**

PLAN FILE No.